

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**


THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : A47G 27/02		A1	(11) International Publication Number: WO 96/20627
			(43) International Publication Date: 11 July 1996 (11.07.96)
(21) International Application Number: PCT/DK95/00523		(81) Designated States: AL, AM, AT, AT (Utility model), AU, BB, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 28 December 1995 (28.12.95)			
(30) Priority Data: 1495/94 29 December 1994 (29.12.94) DK 0382/95 4 April 1995 (04.04.95) DK			
(71) Applicant (for all designated States except US): ERGOMAT DANMARK A/S [DK/DK]; Bødkervej 8, DK-5750 Ringe (DK).			
(72) Inventors; and (75) Inventors/Applicants (for US only): MÅNSSON, Lars, Haahr [DK/DK]; Grøvlingeløkken 3 D, DK-5210 Odense NV (DK). ØSTERGAARD, Torben, Weng [DK/DK]; Juelsgade 8 st., DK-5000 Odense C (DK).			
(74) Agent: SKØTT-JENSEN, K.; Patentingeniører a/s, Lemmingvej 225, DK-8361 Hasselager (DK).		Published With international search report. In English translation (filed in Danish).	

(54) Title: A MAT AS A SUPPORT FOR PERSONS IN A STANDING WORKING POSTURE

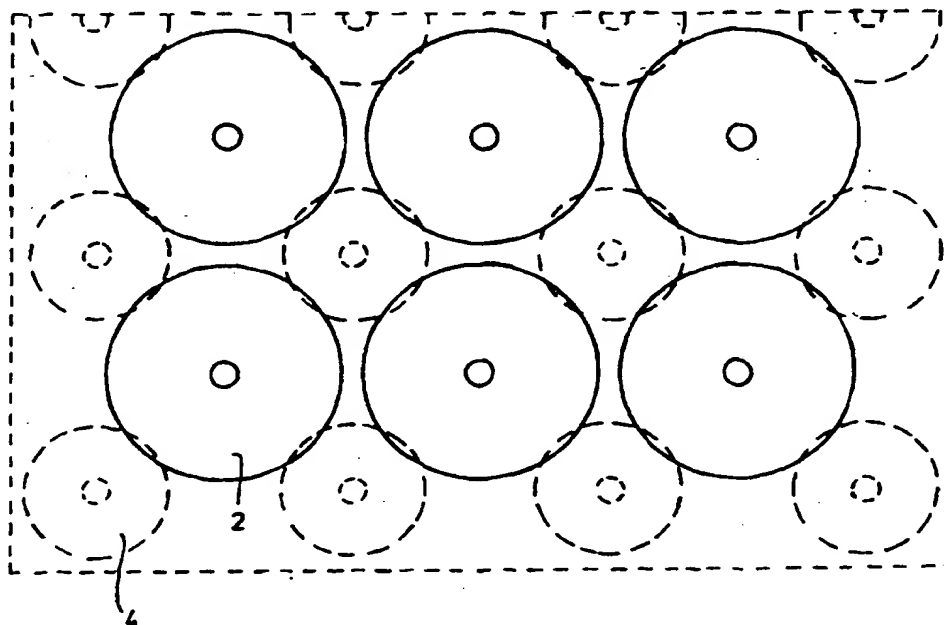

(57) Abstract

A mat of elastic material as a support for persons in a standing working posture has a pattern of punctiformed upwardly extending portions (2) on the upper side. The underside of the mat has a pattern of downwardly extending punctiformed portions (4) by means of which the mat rests on a support. The two sets of patterns (2, 4) are mutually offset so that, figuratively speaking, the portions on the upper side float between the supporting portions on the underside. The mat has an excellent standing comfort and lends itself extremely well for use in industries having strict hygiene requirements, such as in the food processing and drug industries.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11)

Veröffentlichungsnummer:

(11)

Publication number:

(11)

Numéro de publication:

0 800 358

Internationale Anmeldung veröffentlicht durch die
Weltorganisation für geistiges Eigentum unter der Nummer:

WO 96/20627 (art.158 des EPÜ).

International application published by the World
Intellectual Property Organisation under number:

WO 96/20627 (art.158 of the EPC).

Demande internationale publiée par l'Organisation
Mondiale de la Propriété sous le numéro:

WO 96/20627 (art.158 de la CBE).

THIS PAGE BLANK (USPTO)

influence on the comfort properties of the mat. The flatter the sides on the portions are, the more these can overlap each other, as the thickness in the area of overlap is not increased considerably.

5

Further, the mat has better drain properties because of the punctiformed supporting portions and may be placed arbitrarily with respect to a given liquid flow on the floor, where a rib pattern has to be oriented in the direction of flow to allow the water to run inwardly below the mat. Owing to accumulation of dirt and growth sites for bacteria, fungi and microorganisms in general, it is decisive that the contact with the floor is as minimal as possible. Apart from the fact that the mat per se must be easy to clean, the punctiformed supporting portions also facilitate cleaning of the floor below it.

10
15

The geometry of the punctiformed portions may vary widely and does not have to be the same on the upper side and the underside. Examples of geometrical shapes include squares, trapeziums, triangles, spherical segments, polygons and cones, just to mention a few.

20

Portions on the underside of the mat terminating in a tip have been found to possess a not quite satisfactory antiskid property in certain situations. Therefore, portions having a certain longitudinal extent are selected to improve the antiskid property, and the portions are angled mutually, optionally grouped, to provide a uniform antiskid property in all directions. If just the longitudinal extent of the portions is not too great, the comfort of the mat will not be affected noticeably.

25
30

An embodiment of the invention will be described more fully below with reference to the accompanying drawing, in which:

35

A mat as a support for persons in a standing working posture

The invention concerns a mat as a support for persons in a standing working posture and comprising a carrier layer having a pattern of upwardly extending portions on the upper side and a pattern of downwardly extending portions on the underside by means of which the mat rests on a support, said two patterns being mutually offset.

10

Elastically resilient mats as a support for persons in a standing working posture to counteract fatigue and injuries to legs and spine are known. A mat of the above type is described in the Danish Patent Application No. 348/93, wherein the two patterns are formed by continuous ribs on the upper side and underside of the mat. The ribs on the upper side are arranged in the spaces between the ribs on the underside and are narrower than the spaces, whereby tension is generated in the free carrier layer section on each side of the ribs when stepping on these.

20

The invention provides a mat of the type stated in the opening paragraph having a punctiformed pattern on the upper side and the underside. This embodiment has been found to give a better standing comfort, as it yields resiliently in the punctiformed areas and non in line-shaped areas determined by a rib pattern, i.e. the mat can better adapt to the foot pressure thereon. The properties are moreover uniform irrespective of the direction in which the feet are oriented on the mat, while this is not the case with a rib pattern where the properties are noticeably different in the longitudinal direction of the ribs than in the transverse direction. It is noted that a minor overlap of the portions on the upper side and the underside, particularly where the portions are formed with inclined sides, has been found to have no noticeable

30

35

is supported by four cones 4 on the underside thereof. As shown, the cones on the underside of the mat are tangent to the cones on the underside figuratively speaking, as they are separated by the carrier layer 6. Thus, there are no direct supports below the tread cones 4 on the underside of the mat, i.e. they float between the supporting cones 4 on the underside of the mat. A foot pressure on the tread cones 2 will press these elastically down between the supporting cones 4, thereby creating elastic tensile stresses in the carrier layer 6. The point-shaped pattern ensures good adaptation to the footprint on the mat, as the shape of the mat conforms to the print in points. The circumstance that the cones on the underside of the mat rest on the support 8 with their tips, also contributes to improving the good elastic properties of the mat. Further, it provides the smallest possible contact face with the floor, thereby reducing growth sites for bacterial fungi and microorganisms in general, and dust entrained by a flow of water below the mat does not easily stick to the downwardly directed cones. Also, the cone pattern ensures a substantially free flow below the mat.

At locations where the floor is slippery and perhaps also wet, it may be difficult to obtain a sufficient resistance to skidding. The friction may be increased by making the surface of the supporting cones larger.

Figs. 5 and 6 show a pattern on the mat underside having elongate portions 10, which provide an improved antiskid property. The portions are arranged in groups of three, said groups being perpendicular to each other. The upper side of the mat may have a truncated cone pattern 2 like before, there being three truncated cones 2 between two parallel portions 10. Irrespective of the direction, the truncated cones 2 will be perceived as being provided be-

fig. 1 shows a section of a mat seen directly from above,

5 fig. 2 shows a section of the mat seen directly from below,

fig. 3 shows an enlarged section of the mat pattern on the upper side and the underside, the pattern on the underside being shown in dashed line,

10

fig. 4 shows a section of the mat seen directly from the side,

15 fig. 5 shows a section like in fig. 3, where the mat is provided with a different pattern on the underside consisting of elongate portions, and

fig. 6 shows a section of the mat shown in fig. 5.

20 Fig. 1 of the drawing shows a full scale section of the mat seen directly from above. It appears that the upper side has a pattern of closely spaced cones 2 or rather truncated cones as the outer tip is absent. Between these
25 cones 2 the mat has a pattern on the underside consisting of a another set of more widely spaced cones, as shown in full scale in fig. 2. The shapes of the cones are identical, but the cones on the underside of the mat are not as high as on the upper side. The dimensions appear from
30 fig. 4 of the drawing, which shows an enlarged section of the mat seen directly from the side, and in which the carrier layer is designated 6.

Fig. 3 of the drawing shows an enlarged section of the mat seen directly from above, where the cones on the upper
35 side of the mat are shown in dashed line. As appears from the figure, each cone 2 on the upper side of the mat

P a t e n t C l a i m s :

1. A mat as a support for persons in a standing working
5 posture and comprising a carrier layer (6) having a pat-
tern of upwardly extending portions (2) on the upper side
and a pattern of downwardly extending portions (4, 10) on
the underside by means of which the mat rests on a sup-
port (8), said two patterns being mutually offset, c h a
10 r a c t e r i z e d in that the portions are
punctiformed.

2. A mat according to claim 1, c h a r a c t e r i z e d
in that the punctiformed portions (2, 4, 10) touch or
15 substantially touch each other in a common plane.

3. A mat according to claim 1 or 2, c h a r a c t e r -
i z e d in that the portions are conical or frustoconi-
cal.

20

4. A mat according to claim 1, 2 or 3, c h a r a c -
t e r i z e d in that the punctiformed portions (4) on
the underside are smaller than the punctiformed portions
on the upper side (2).

25

5. A mat according to any one of claims 1-4, c h a r -
a c t e r i z e d in that the end face on the
punctiformed portions (4) on the underside thereof is
relatively large to provide a great antiskid property.

30

6. A mat according to any one of claims 1-5, c h a r -
a c t e r i z e d in that the portions (10) on the
underside of the mat are elongated to provide a great
antiskid property.

35

tween the elongate portions 10, whose height correspond to the height of the truncated cones 2. The transition between the portions 10 and the intermediate layer 6 is rounded to avoid notch effects. The total width of the portions almost corresponds to the base diameter of the truncated cones.

It will be appreciated that the upper side may be formed with a corresponding pattern of elongate portions, and that a combination of elongate and truly dot-shaped portions may be provided on both the underside and the upper side. In the pattern, the elongate portions may just as well be arranged at an inclined angle, e.g. 45° with respect to each other. The invention thus provides a mat having an excellent comfort for standing persons, said mat lending itself extremely well for use in the food processing industry and the drug industry where the hygiene requirements are very strict, but, of course, the mat may also be used elsewhere.

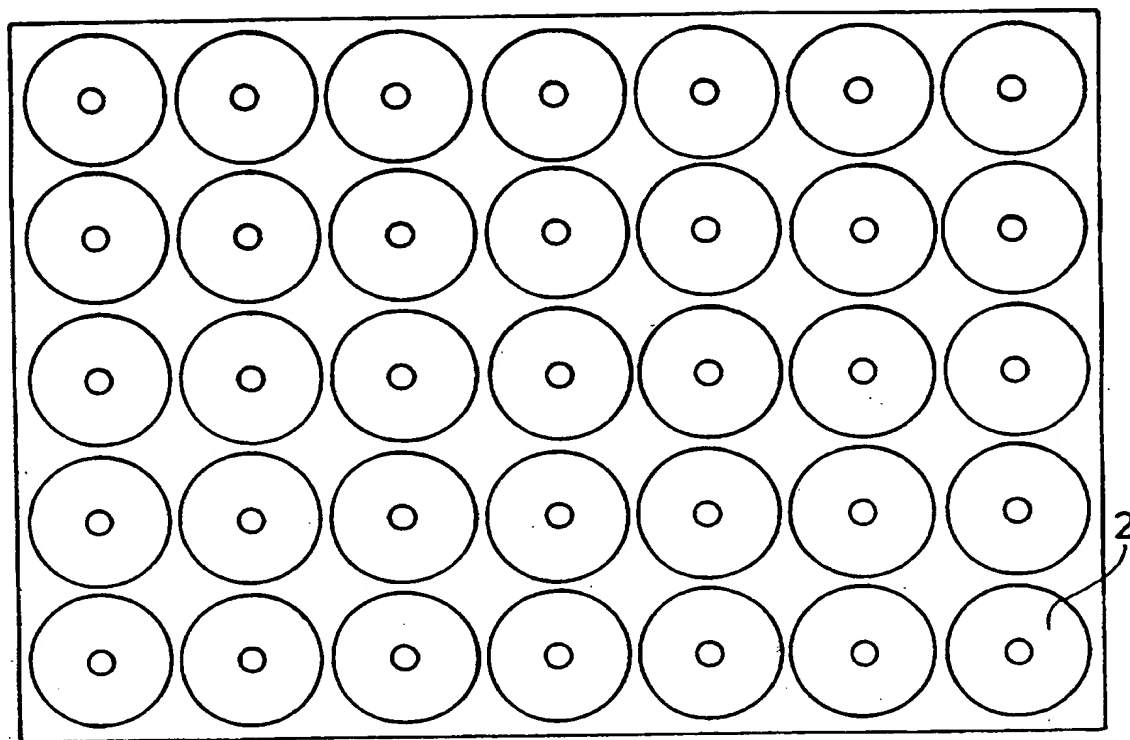


FIG.1

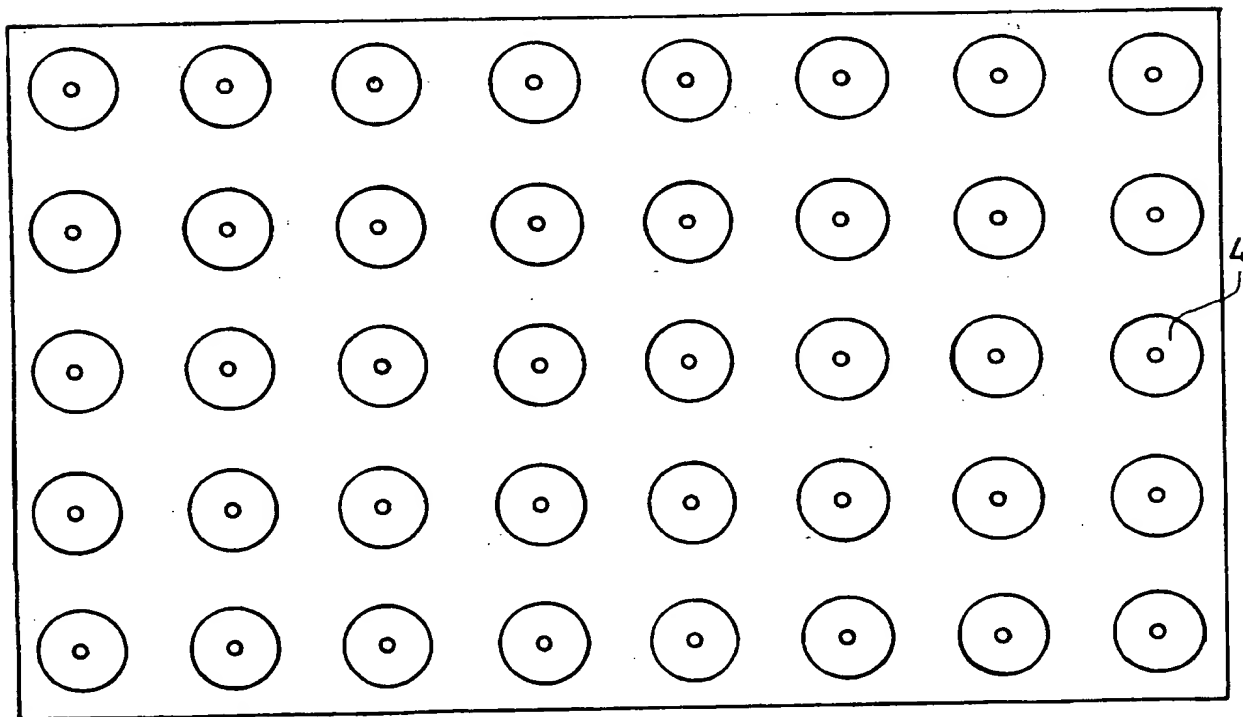


FIG.2

7. A mat according to any one of claims 1-6 having non-rotationally symmetrical portions, c h a r a c t e r i z e d in that these are gathered in groups which are angled with respect to each other to provide a great antiskid property.

8. A mat according to any one of claims 1-7, c h a r a c t e r i z e d in that the portions (10) on the underside of the mat are short ribs gathered in groups of three which are angled 90° with respect to each other.

9. A mat according to claim 8, c h a r a c t e r i z e d in that length of each short rib (10) corresponds to three portions (2) on the upper side of the mat.

10. A mat according to claim 9, c h a r a c t e r i z e d in that the punctiformed portions (2) on the upper side are conical or frustoconical.

3/3

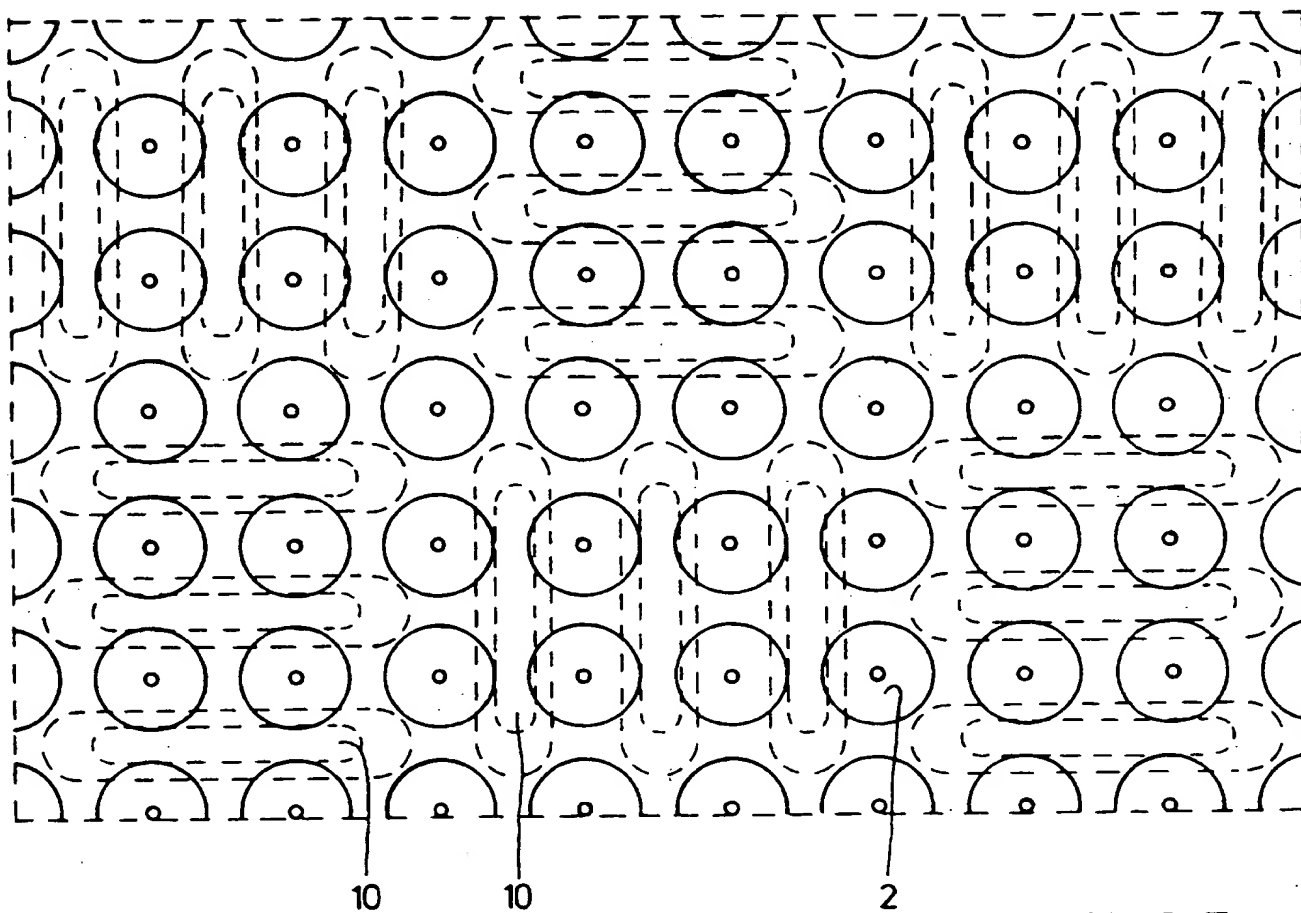


FIG. 5

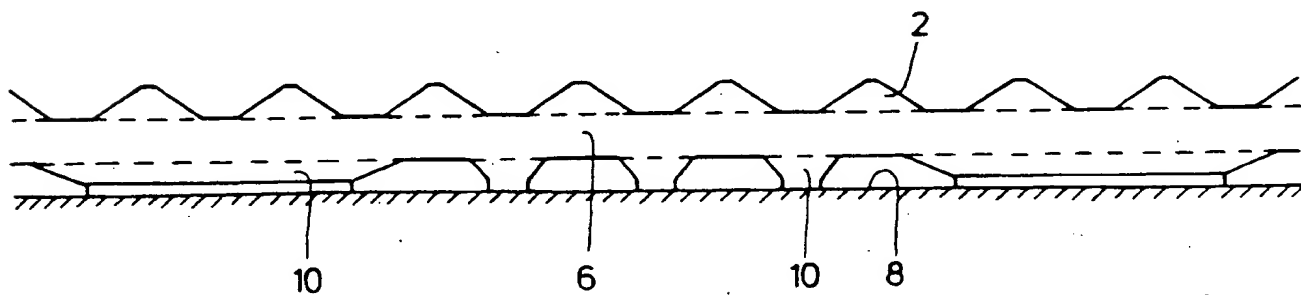


FIG. 6

SUBSTITUTE SHEET (RULE 26)

2/3

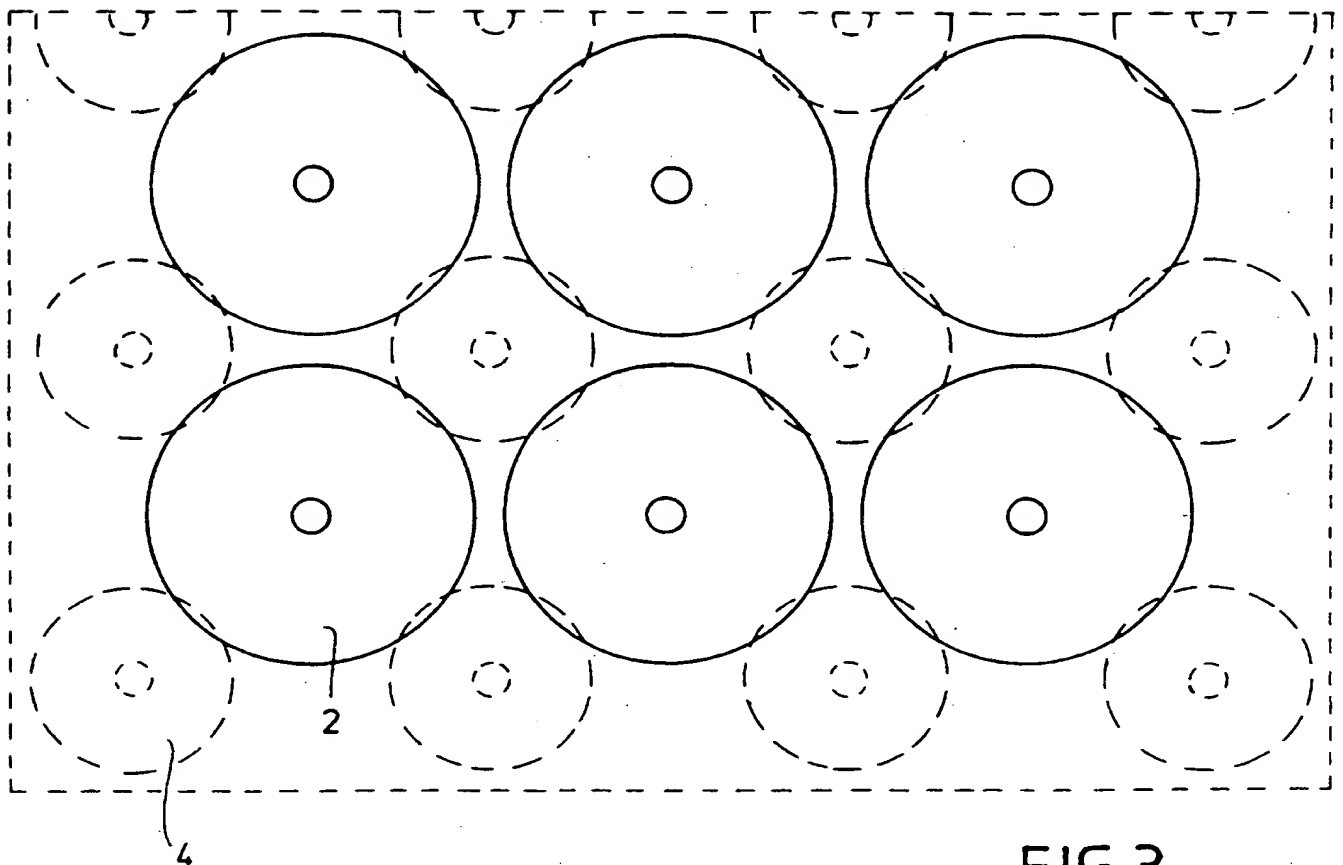


FIG.3

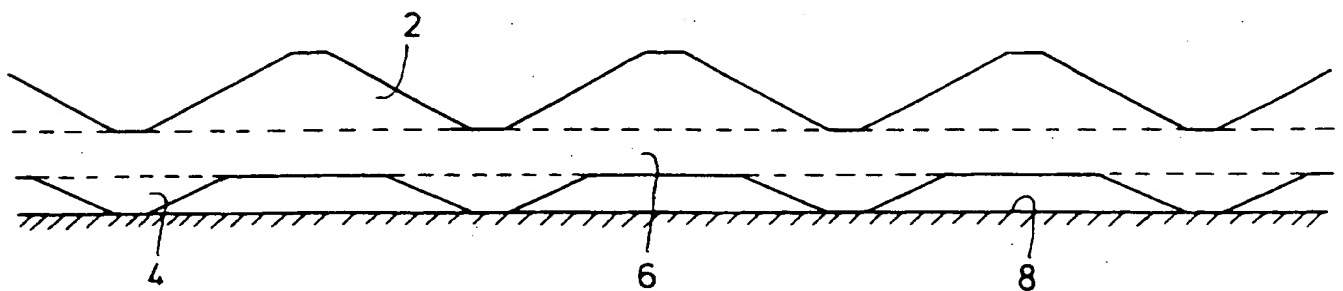


FIG.4

INTERNATIONAL SEARCH REPORT

Information on patent family members

05/02/96

International application No.

PCT/DK 95/00523

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
DK-B1-	170603	26/09/94	NONE		
SE-A-	104758	16/06/42	NONE		
DE-A-	2029363	22/07/71	SE-B-	363968	11/02/74
US-A-	5331750	26/07/94	DE-D,T-	3887994	25/08/94
			EP-A,B-	0434834	03/07/91
			JP-A-	63270062	08/11/88
			WO-A-	8809448	01/12/88
			JP-A-	63294803	01/12/88
FR-A1-	7532271	20/05/77	NONE		
GB-A-	983445	17/02/65	NONE		

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 95/00523

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: A47G 27/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: A47G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DK 170603 B1 (KG PRODUCTION APS), 26 Sept. 1994 (26.09.94)	1,2,4,5
A	--	3,6-10
A	SE 104758 A (BJURHAGENS FABRIKERS AKTIEBOLAG), 16 June 1942 (16.06.42)	1-10
A	DE 2029363 A (SICKEL, HELMUT), 22 July 1971 (22.07.71)	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 March 1996

Date of mailing of the international search report

02-04-1996

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Helene Eliasson

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 95/00523

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5331750 A (SASAKI ET AL), 26 July 1994 (26.07.94)	1-2,4-5
A	--	3,6-10
A	FR 7532271 A1 (ETABLISSEMENTS DAUPHANT ET DAUPHANT PAUL), 20 May 1977 (20.05.77)	
A	-- GB 983445 A (PORON INSULATION LIMITED), 17 February 1965 (17.02.65) -----	